

Vol III Issue IX March 2014

Impact Factor : 2.2052(UIF)

ISSN No :2231-5063

International Multidisciplinary Research Journal

Golden Research Thoughts

Chief Editor
Dr.Tukaram Narayan Shinde

Publisher
Mrs.Laxmi Ashok Yakkaldevi

Associate Editor
Dr.Rajani Dalvi

Honorary
Mr.Ashok Yakkaldevi

IMPACT FACTOR : 2.2052(UIF)

Welcome to GRT

RNI MAHMUL/2011/38595

ISSN No.2231-5063

Golden Research Thoughts Journal is a multidisciplinary research journal, published monthly in English, Hindi & Marathi Language. All research papers submitted to the journal will be double - blind peer reviewed referred by members of the editorial board. Readers will include investigator in universities, research institutes government and industry with research interest in the general subjects.

International Advisory Board

Flávio de São Pedro Filho Federal University of Rondonia, Brazil	Mohammad Hailat Dept. of Mathematical Sciences, University of South Carolina Aiken	Hasan Baktir English Language and Literature Department, Kayseri
Kamani Perera Regional Center For Strategic Studies, Sri Lanka	Abdullah Sabbagh Engineering Studies, Sydney	Ghayoor Abbas Chotana Dept of Chemistry, Lahore University of Management Sciences[PK]
Janaki Sinnasamy Librarian, University of Malaya	Catalina Neculai University of Coventry, UK	Anna Maria Constantinovici AL. I. Cuza University, Romania
Romona Mihaila Spiru Haret University, Romania	Ecaterina Patrascu Spiru Haret University, Bucharest	Horia Patrascu Spiru Haret University, Bucharest,Romania
Delia Serbescu Spiru Haret University, Bucharest, Romania	Loredana Bosca Spiru Haret University, Romania	Ilie Pinteau, Spiru Haret University, Romania
Anurag Misra DBS College, Kanpur	Fabricio Moraes de Almeida Federal University of Rondonia, Brazil	Xiaohua Yang PhD, USA
Titus PopPhD, Partium Christian University, Oradea,Romania	George - Calin SERITAN Faculty of Philosophy and Socio-Political Sciences AL. I. Cuza University, IasiMore

Editorial Board

Pratap Vyamktrao Naikwade ASP College Devrukh,Ratnagiri,MS India	Iresh Swami Ex - VC. Solapur University, Solapur	Rajendra Shendge Director, B.C.U.D. Solapur University, Solapur
R. R. Patil Head Geology Department Solapur University,Solapur	N.S. Dhaygude Ex. Prin. Dayanand College, Solapur	R. R. Yaliker Director Managment Institute, Solapur
Rama Bhosale Prin. and Jt. Director Higher Education, Panvel	Narendra Kadu Jt. Director Higher Education, Pune	Umesh Rajderkar Head Humanities & Social Science YCMOU,Nashik
Salve R. N. Department of Sociology, Shivaji University,Kolhapur	K. M. Bhandarkar Praful Patel College of Education, Gondia	S. R. Pandya Head Education Dept. Mumbai University, Mumbai
Govind P. Shinde Bharati Vidyapeeth School of Distance Education Center, Navi Mumbai	Sonal Singh Vikram University, Ujjain	Alka Darshan Shrivastava Shaskiya Snatkottar Mahavidyalaya, Dhar
Chakane Sanjay Dnyaneshwar Arts, Science & Commerce College, Indapur, Pune	G. P. Patankar S. D. M. Degree College, Honavar, Karnataka	Rahul Shriram Sudke Devi Ahilya Vishwavidyalaya, Indore
Awadhesh Kumar Shirotriya Secretary,Play India Play,Meerut(U.P.)	Maj. S. Bakhtiar Choudhary Director,Hyderabad AP India.	S.KANNAN Annamalai University,TN
	S.Parvathi Devi Ph.D.-University of Allahabad	Satish Kumar Kalhotra Maulana Azad National Urdu University
	Sonal Singh, Vikram University, Ujjain	

**Address:-Ashok Yakkaldevi 258/34, Raviwar Peth, Solapur - 413 005 Maharashtra, India
Cell : 9595 359 435, Ph No: 02172372010 Email: ayisrj@yahoo.in Website: www.aygrt.isrj.net**



GRT EMISSION ANALYSIS OF DI-DIESEL ENGINE AT DIFFERENT INJECTION PRESSURES USING JATROPHA AND RUBBER SEED OIL BLENDED WITH DIESEL

S. Mahalingam and B. R. RameshBapu

Research Scholar, Sathyabama University, Chennai, India.
Dean(R&D), Chennai Institute of Technology, Chennai, India.

Abstract:-Biodiesel as a renewable fuel has been considered as the best alternate for diesel fuel now a days. This fossil fuel can be used in diesel engine with or without any modification. The injection pressure and injection timing are the major influencing parameters for the performance and emission of diesel engine. In this present study, the emission analysis of vegetable oil, Jatropha oil and rubber seed oil crushed from the seed, esterified and blended with pure diesel fuel. A single cylinder constant speed direct injection (DI) diesel engine has been used to analyze the emission characteristics of biodiesel. The diesel engine for various fuel injection pressures (210, 220 and 240 bar) at no load to full load was investigated. The injection pressure was changed in the engine head by adjusting the fuel injector spring tension. The two proportions of biodiesel were used in diesel engine such as 20% of biodiesel (Jatropha oil and Rubber seed oil) with 80% of pure diesel fuel named as B20 and 40% of biodiesel with 60% of pure diesel fuel named as B40. From the test result, the nitric oxide (NO_x) was analyzed for different injection pressures. In emission characteristics analysis, it was found that the increase in injector opening pressure increases the NO_x emission. The injection pressure of 240 bar and B20 proportion gives better emission reduction compared to other blended fuels.

Keywords: Injection pressure, emission, Jatropha oil, rubber seed oil.

1. INTRODUCTION:

Direct injection diesel engines are commonly used in the transportation and power production sectors due to their high brake thermal efficiency and low specific fuel consumption. For solving the problem of increased demand for petroleum products, many researchers are focusing on biofuels nowadays. Varieties of biofuels were derived from the vegetable oil and animal fats. These types of biofuels are not directly used in engine because they have high viscosity and lower calorific value. The different types esterification process is used to improve the fuel properties and reduction of emissions.

Due to the increasing of compression ratio and advancement of injection timing, the brake specific fuel consumption and exhaust gas temperature were increased, whereas the brake thermal efficiency was decreased with increase in the proportion of biodiesel in different blends of biodiesel-diesel mixture. [1].

The EGR is increasing the injection pressure; the NO_x was considerably reduced in multicylinder diesel engine [2]. The injection timing was retarded from the original injection timing in a diesel engine using ethanol blended fuels the NO_x and CO₂ emission increased [3].

Three injection timing such as 240, 270, and 300 were used in the single cylinder diesel engine. The waste cooking oil as biodiesel was blended with the diesel fuel to analyze the emission and performance of the engine. The engine injection parameter was retarded and advanced the corresponding NO_x, CO₂, CO emission were increased and decreased, and these experimental results were compared with that of the ANN model to predict the relative mean error values [4]. The bio-diesel emission characteristics not met the standard NO_x emission in combustion process. The different exhaust gas treatment was used to reduce the NO_x emission of biodiesel. [5]

Previous investigations on the NO reduction of direct injection diesel engine fuelled with biodiesel by employing fuel injection retardation, advanced and EGR [18–26] results was obtained in reduction of brake thermal efficiency (BTE) and increased exhaust smoke density [6–8]. They are vegetable oil, CO neutral with less sulphur content and can be easily produced in rural areas. Due to high combustion, engine deposits, engine oil contamination and high exhaust smoke emissions [9–10].

In this study, the effects of injection timing of jatropa oil and rubber seed oil blended with diesel fuel on the exhaust emissions characteristics of CO,NO_x were experimentally investigated on a single cylinder constant speed diesel engine. Table.1 shows the properties of fuels used in the tested engine.

Table1. Properties of Fuels

Property	Diesel	Rubber seed oil	Jatropa oil	Biodiesel (Rubber seed and Jatropa)
Sp. Gravity	0.74	0.82	0.96	0.90
Viscosity at 40 ⁰ C(mm ² /s)	4.15	4.2	4.4	4.2
Calorific Value (KJ/kg)	42000	37000	38500	39500
Carbon residues%	0.12	0.19	0.61	0.26
Iodine value	0.067	133.46	120.5	133.32

2. EXPERIMENTAL PROCEDURE


A constant speed diesel engine was used to evaluate the emission characteristics of rubber seed oil and jatropa oil. The diesel runs from no load condition to full load condition maintaining a speed of 1500 rpm with the proportions B20 and B40. The brake power was measured with the help of an electric dynamometer and air cooled system. An AVL415 smoke meter was provided for measuring the smoke opacity and exhaust emission temperatures. The AVL software was also used to obtain various curves and results during engine operation. An exhaust gas analyzer was used to measure the emission characteristics such as CO₂, CO, HC, NO_x, and O₂ values from the exhaust gas. The emission test was conducted at the compression ratio of 17.5 for different injection timing such as 210, 240, and 270 with brake power of 4.4 kW.

3. RESULTS AND DISCUSSIONS

3.1 Nitric oxide (NO_x)

Fig.1 shows the NO_x exhaust emission data for the diesel engine with the different injection pressures. NO_x emissions are produced inside the combustion chamber during the combustion process due to the chemical reaction of atomic oxygen and nitrogen. If the exhaust temperature increases, the NO_x increases with different power. Additional fuel input to the engine results in the higher temperature in engine cylinder and delivered large amount of NO_x exhaust emission.

From the graph, it was observed that when injection pressures increase, the NO_x emission was reduced. The test was carried out using three different pressures such as 200 bar, 220 bar, 240 bar. Two biodiesel proportions such as B20 and B40 were used to analyze the NO_x emission in constant speed diesel engine. At the 200 bar test result, it was always higher compared to another two pressures. At 200 bar, the NO_x emission was varied from 204 ppm to 1007 ppm. When the engine pressure was maintained at 220 bar, the NO_x was increased with the blends of biodiesel. From the result for pure diesel fuel, the NO_x was increased from no load condition as 99 ppm to full load condition as 815 ppm. For B20 proportion, it was varied from 216 ppm to 899 ppm. The NO_x emission for the B20 blend was increased when compared to the pure diesel fuel. When the biodiesel concentration was B40 at 220 bar, the NO_x was again increased to a range of 154 ppm to 933 ppm from no load to full load which was higher than other two pressures. It might be due to poor concentration and high viscosity of blended fuels. The next stage of pressure was increased as 240 bar, which is the highest injection pressure of this experiment. For this pressure using normal diesel fuel, less amount of NO_x was emitted compared to other pressures. This might be due to the higher pressure in combustion chamber where complete combustion takes place inside the engine. The comparison of three pressures in test engine shows that when using pure diesel at 240 bar gives better results. The two blends of B20 and B40 were also tested at highest injection pressure of 240 bar. From the test result, for B20 the NO_x was slightly closer to that of the pure diesel fuel. It was varied from 137 ppm to 710 ppm. This gives better result than other two pressures. Further increasing the biodiesel concentration as B40 at 240 bar, the NO_x was increased. It was varied from 155 ppm at no load condition and 815 ppm at full load condition at the rated power of 4.4 kW.

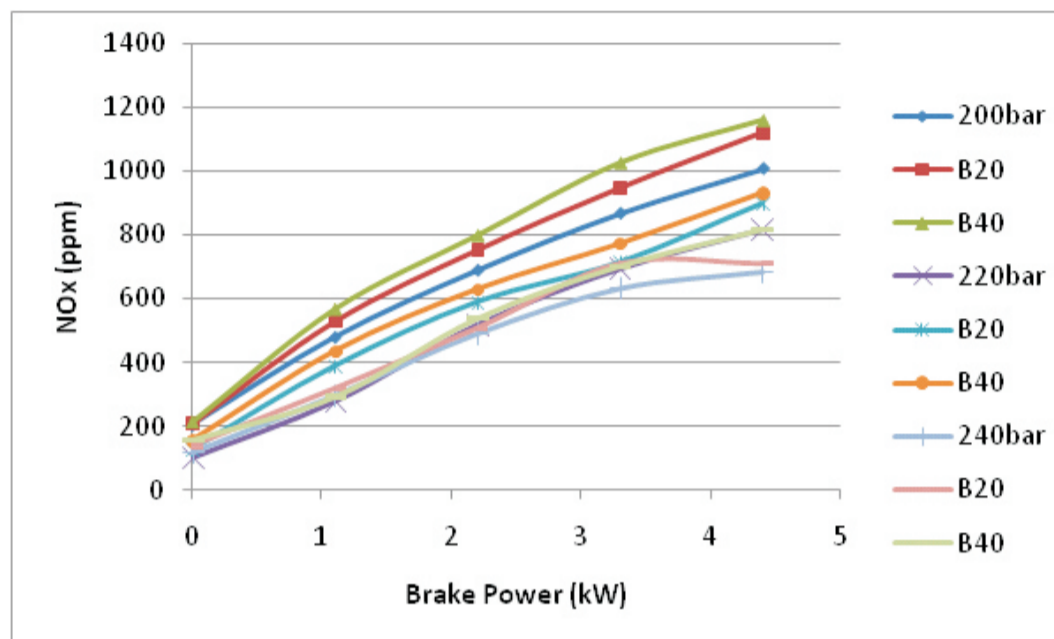

4. CONCLUSION

The constant speed DI engine was used to analyze the NO_x emission characteristics and compared with pure diesel fuel. The test result was discussed based on the experimental investigations carried out with the jatropha oil and rubber seed oil blends in pure diesel. The following results were obtained for three different injection pressures.

1. The injection pressure was reduced from the designed pressure as 210 bar, the NO_x was increased. The injection pressure increased as 220 bar, the NO_x was reduced. For 220 bar pressure less amount of NO_x was emitted when compared to 210 bar pressure.
2. Further increasing of injection pressure to 240 bar, the NO_x was again reduced. Finally for the B20 blend at 240 bar, the NO_x emission was very less which gives better performance when compared to the other injection pressures and proportions. From the test result, it was found that the increasing of injection pressure in a single cylinder constant speed diesel engine, reduces the NO_x emission considerably to a minimum level.

5. REFERENCES

1. Raheman. Hetal 'Performance of diesel engine with biodiesel at varying compression ratio and ignition timing' Fuel 87 (2008) 2659–2666.
2. Labecki. L 'Effects of injection parameters and EGR on combustion and emission characteristics of rapeseed oil and its blends in diesel engines' fuel 98(2012) 15-28.
3. Cenksayin 'Influence of injection timing on the exhaust emissions of a dual-fuel CI engine' Renewable Energy 33 (2008) 1314–1323
4. Shivakumar 'Artificial Neural Network based prediction of performance and emission characteristics of a variable compression ratio CI engine using WCO as a biodiesel at different injection timings' Applied Energy 88 (2011) 2344-2354.
5. Sarofim AF, Flagan R.C. NO_x control for stationary combustion sources. Prog Energy Combust Sci 1976;2(1):1–25.
6. Abd-Alla GH. Using exhaust gas recirculation in internal combustion engines: a review. Energy Conversion Management 2002;43:1027–42.
7. Bari S, Yu CW, Lim TH. Effect of fuel injection timing with waste cooking oil as a fuel in a direct injection diesel engine, Proceedings of the institution of mechanical engineers. Part D. J Automobile Engg 2004; 218:93–104.
8. Mani M, Nagarajan G. Influence of injection timing performance, emission and combustion characteristics of a diesel engine running on waste plastic oil. Energy 2009; 34:1617–23.
9. Bandel, Heinrich. Vegetable oil derived fuels and problems related to their use in diesel engines. International Conference on Plant and Vegetable Oils as Fuels, North Dakota, USA; 1982.
10. Ziejewski M, Goettier H. Influence of vegetable oil based alternate fuels on residue deposits and components wear in a diesel engine. Society of

Automotive Engineers, Paper no. 860302, USA; 1986.

11. Benjumea P, Agudelo J, Agudelo A. Effect of altitude and palm oil biodieselfuelling on the performance and combustion characteristics of a HSDI diesel engine. Fuel 2009;88:725e31.



S. Mahalingam

Research Scholar, Sathyabama University, Chennai, India.

Publish Research Article International Level Multidisciplinary Research Journal For All Subjects

Dear Sir/Mam,

We invite unpublished Research Paper, Summary of Research Project, Theses, Books and Book Review for publication, you will be pleased to know that our journals are

Associated and Indexed, India

- * International Scientific Journal Consortium
- * OPEN J-GATE

Associated and Indexed, USA

- EBSCO
- Index Copernicus
- Publication Index
- Academic Journal Database
- Contemporary Research Index
- Academic Paper Database
- Digital Journals Database
- Current Index to Scholarly Journals
- Elite Scientific Journal Archive
- Directory Of Academic Resources
- Scholar Journal Index
- Recent Science Index
- Scientific Resources Database
- Directory Of Research Journal Indexing

Golden Research Thoughts
258/34 Raviwar Peth Solapur-413005, Maharashtra
Contact-9595359435
E-Mail-ayisrj@yahoo.in/ayisrj2011@gmail.com
Website : www.aygrt.isrj.net