
International Multidisciplinary Research Journal

Golden Research Thoughts

Chief Editor
Dr.Tukaram Narayan Shinde

Publisher
Mrs.Laxmi Ashok Yakkaldevi

Associate Editor
Dr.Rajani Dalvi

Honorary
Mr.Ashok Yakkaldevi

Welcome to GRT

RNI MAHMUL/2011/38595

ISSN No.2231-5063

Golden Research Thoughts Journal is a multidisciplinary research journal, published monthly in English, Hindi & Marathi Language. All research papers submitted to the journal will be double - blind peer reviewed referred by members of the editorial board. Readers will include investigator in universities, research institutes government and industry with research interest in the general subjects.

International Advisory Board

Flávio de São Pedro Filho Federal University of Rondonia, Brazil	Mohammad Hailat Dept. of Mathematical Sciences, University of South Carolina Aiken	Hasan Baktir English Language and Literature Department, Kayseri
Kamani Perera Regional Center For Strategic Studies, Sri Lanka	Abdullah Sabbagh Engineering Studies, Sydney	Ghayoor Abbas Chotana Dept of Chemistry, Lahore University of Management Sciences[PK]
Janaki Sinnasamy Librarian, University of Malaya	Ecaterina Patrascu Spiru Haret University, Bucharest	Anna Maria Constantinovici AL. I. Cuza University, Romania
Romona Mihaila Spiru Haret University, Romania	Loredana Bosca Spiru Haret University, Romania	Ilie Pinteau, Spiru Haret University, Romania
Delia Serbescu Spiru Haret University, Bucharest, Romania	Fabricio Moraes de Almeida Federal University of Rondonia, Brazil	Xiaohua Yang PhD, USA
Anurag Misra DBS College, Kanpur	George - Calin SERITAN Faculty of Philosophy and Socio-Political Sciences AL. I. Cuza University, IasiMore
Titus PopPhD, Partium Christian University, Oradea,Romania		

Editorial Board

Pratap Vyamktrao Naikwade ASP College Devrukh,Ratnagiri,MS India	Iresh Swami Ex - VC. Solapur University, Solapur	Rajendra Shendge Director, B.C.U.D. Solapur University, Solapur
R. R. Patil Head Geology Department Solapur University,Solapur	N.S. Dhaygude Ex. Prin. Dayanand College, Solapur	R. R. Yaliker Director Managment Institute, Solapur
Rama Bhosale Prin. and Jt. Director Higher Education, Panvel	Narendra Kadu Jt. Director Higher Education, Pune	Umesh Rajderkar Head Humanities & Social Science YCMOU,Nashik
Salve R. N. Department of Sociology, Shivaji University,Kolhapur	K. M. Bhandarkar Praful Patel College of Education, Gondia	S. R. Pandya Head Education Dept. Mumbai University, Mumbai
Govind P. Shinde Bharati Vidyapeeth School of Distance Education Center, Navi Mumbai	Sonal Singh Vikram University, Ujjain	Alka Darshan Shrivastava Shaskiya Snatkottar Mahavidyalaya, Dhar
Chakane Sanjay Dnyaneshwar Arts, Science & Commerce College, Indapur, Pune	G. P. Patankar S. D. M. Degree College, Honavar, Karnataka	Rahul Shriram Sudke Devi Ahilya Vishwavidyalaya, Indore
Awadhesh Kumar Shirotriya Secretary,Play India Play,Meerut(U.P.)	Maj. S. Bakhtiar Choudhary Director,Hyderabad AP India.	S.KANNAN Annamalai University,TN
	S.Parvathi Devi Ph.D.-University of Allahabad	Satish Kumar Kalhotra Maulana Azad National Urdu University
	Sonal Singh, Vikram University, Ujjain	

Address:-Ashok Yakkaldevi 258/34, Raviwar Peth, Solapur - 413 005 Maharashtra, India
Cell : 9595 359 435, Ph No: 02172372010 Email: ayisrj@yahoo.in Website: www.aygrt.isrj.org

International Recognized Double-Blind Peer Reviewed Multidisciplinary Research Journal

Golden Research Thoughts

ISSN 2231-5063

Impact Factor :3.4052(UIF)

Volume - 4 | Issue - 11 | May - 2015

Available online at www.aygrt.isrj.org

FEASIBILITY STUDY OF UTILIZING SOLAR ENERGY IN AUTOMOBILE AIR CONDITIONING



Sonu Yadav

M.Tech.Student, Mechanical Engg. Department, YMCA University of Sc & Technology, Faridbad.

short profile :

Sonu Yadav is a M.Tech., Student at Department of Mechanical Engineering in YMCA University of Sc & Technology, Faridbad. He has completed B.Tech., GATE., M.Tech. He has published 2 research papers

Co- Author Details :

M. L. Aggarwal

Professor, Mechanical Engg. Department, YMCA University of Sc & Technology, Faridabad.



ABSTRACT:

Air conditioner is the primary accessory of a passenger car which is used to maintain the vehicle cabin temperature and humidity at comfortable levels for a passenger. But this system consumes a lot of power and negatively affects the fuel efficiency of a car. Depleting natural oil resources, increasing oil prices and environment pollution increases the awareness about the need to use renewable sources. In past years, lot of efforts are being spent towards the application of

solar energy to electric and hybrid cars, but a limited work is done on particularly air conditioning case. In the present work, feasibility study of solar operated hybrid vehicles has been discussed using fossil fuel and supplementary solar energy. **Solar energy is used to run air conditioner or may be for other accessories.** A break even cost analysis has also been carried out by taking a particular case of Maruti-Suzuki Alto car.

KEYWORDS

Hybrid vehicles, air conditioner, cost analysis.

Article Indexed in :

DOAJ

Google Scholar

DRJI

BASE

EBSCO

Open J-Gate

INTRODUCTION

Auto air conditioner consists of compressor, condenser, evaporator and expansion valve. These parts work in a cyclic process which is called vapour compression refrigeration cycle. Compressor is the most power consumable part of the air conditioner. In the present fossil fuel operated cars, compressor runs by directly belt connected with the engine. So, put extra burden on the car engine.

The earth receives more energy from the Sun in just one hour than the world's population uses in a whole year. The total solar energy flux intercepted by the earth on any particular day is 4.2×10^{18} Watt hours or 1.5×10^{22} Joules (6.26×10^{20} Joules per hour). This is equivalent to burning 360 billion tons of oil (toe) per day or 15 Billion ton per hour. Solar power can be converted directly into electrical power in photovoltaic (PV) cells, commonly called solar cells. The sun has a surface temperature of about $6,000^{\circ}\text{C}$, and its hot gases at this temperature emit light that has a spectrum ranging from the ultraviolet, through the visible, into the infrared. Photovoltaic cells generally consist of a light absorber that will only absorb solar photons above certain minimum photon energy. This minimum threshold energy is called the "energy gap" or "band gap", photons with energies below the band gap passes through the absorber, while photons with energies above the band gap are absorbed. Different materials have different band gap range and give different efficiency. Monocrystalline, polycrystalline and amorphous silicon are the main types of solar panel which are used for commercial purpose.

In stand-alone photovoltaic system, the electrical energy produced by the PV array cannot always be used when it is produced because, the demand for energy does not always coincide with its production. Electrical storage batteries are commonly used in PV system. A battery is a device that converts chemical energy into electrical energy and vice versa. The primary functions of a storage battery in a PV system are: Energy Storage Capacity, Autonomy and voltage current Stabilization.

A solar panel may be installed of the roof of the car and generated electricity is stored in the battery. This stored battery power is used to run the compressor of auto air conditioner with the help of electric motor. Use of solar driven auto air conditioner system reduces the load of engine and it directly improves the fuel mileage of the car and less fuel consumption means less air pollution, so it is an eco-friendly system. It reduce the dependency of air conditioner on car engine i.e. there is no need to start the engine for air conditioner operation, this may helpful for many situations like on red lights. It may also enhance the life of air conditioner system by reducing the fluctuation of air conditioner parts. Installation of solar panel on the roof of the car reduces the amount of heat transmitted through the roof. Because those solar heat radiations are absorbed by the solar panel. Major advantage of this AC system is that there is direct relation between solar irradiance and cooling load requirement i.e. more the sunshine more will be the requirement of cooling (say in summer) and less the sunshine less will be the requirement of cooling (say in winter or monsoon). Extra solar energy power can also be used for power the other car accessories like music system, light, 12 V car battery etc.

REVIEW OF LITERATURE

A little work has already done on such kind of hybrid vehicles.

G.Rizzo (2010), studied the photovoltaic efficiency and cost relation with the time and shows a steep drop in photovoltaic power cost curve with time. The integration of photovoltaic panels in

Article Indexed in :

DOAJ	Google Scholar	DRJI
BASE	EBSCO	Open J-Gate

FEASIBILITY STUDY OF UTILIZING SOLAR ENERGY IN AUTOMOBILE AIR CONDITIONING

electric and hybrid vehicles is becoming more feasible, due to the increasing fleet electrification, to the increase in fuel costs, to the advances in terms of PV panel technology, and to the reduction in their cost.

R. Farrington and J. Rugh (2010), studied the impact of vehicle air-conditioning on fuel economy, tailpipe emissions, and electric vehicle range. Conventional air-conditioning loads can reduce EV range and HEV fuel economy by nearly 40% depending on the size of the air-conditioner and the driving cycle. The peak cabin soak temperature must be reduced if a smaller air-conditioning system is to be used. Advanced glazing and cabin ventilation during soak conditions are effective ways to reduce the peak cabin temperature.

Nathan S. Lewis (2005), presented a detailed report on solar energy conversion and conclude several facts like the challenge in converting sunlight to electricity via photovoltaic solar cells is dramatically reducing the cost/watt of delivered solar electricity — by approximately a factor of 5–10% to compete with fossil and nuclear electricity and by a factor of 25–50% to compete with primary fossil energy.

B.D. Sharma (2011), studied the capacity utilization factor for different parts of India and estimated capacity factor varies from 16 to 20% in various parts of the country. At most locations in Rajasthan and Gujrat it is around 20%. In this study designed CUF is calculated for a plant is 20.8 and actual CUF is calculated 16.8.

Ahmad and Tiwari (2009), studied the variation of tilt angle with solar radiation in India. In this study, angle of surface slope from the horizontal (β) varies from 56 degree for January to 0 degree for May and June, again 58 degree for December.

INTEGRATION SYSTEM REQUIRED

Maruti Suzuki 1000 CC Alto car is particularly considered for this study. This car uses five cylinder swash plate reciprocating compressor for air conditioner, which is having pressure range from 1.3MPa (inlet) to 2.7MPa (outlet).

Power required to run this compressor at peak load = 738 Watt.

A 240V single phase alternative current motor of one horse power is required to run this compressor

Car's roof and hood available area is measured for the installation of solar panel:

Available Roof area = $148 \times 85 = 12580 \text{ cm}^2$

Available Hood area = $68 \times 120 = 8160 \text{ cm}^2$

Total area = 20740 cm^2 or 2 m^2

Solar panel specifications:

Type = polycrystalline silicon panel

Power = 280 Watt

Voltage = 24 V

Article Indexed in :

DOAJ	Google Scholar	DRJI
BASE	EBSCO	Open J-Gate

FEASIBILITY STUDY OF UTILIZING SOLAR ENERGY IN AUTOMOBILE AIR CONDITIONING

Polycrystalline silicon panels are selected for this application, because this type of solar panel shows good cost to power ratio as compare to monocrystalline and amorphous silicon panels. Generally polycrystalline panel give an efficiency of 15%, but in this kind of automobile application, angle between solar radiation and solar panel cannot be maintained ideally. And if a mechanism is made for variable sun tracking, then one should have to compromise with the aerodynamic shape of the vehicle. That may cause little improvement and major harm to the vehicle performance. So panel should be placed as the vehicle aerodynamic shape. Due to lack of possibility of ideal angle formation between sun rays and solar panels, panels may work with less effectiveness, so a lower photovoltaic efficiency of 13% is taken for this system design calculations.

Average sunshine received in India = 5.4 kWh/m^2

Power generated when panel receive whole day sunshine = $5.4 \text{ kWh/m}^2 \times 2 \text{ m}^2 \times 0.13$
= 1.404kWh

Generated power is stored battery, having following specifications

Battery type = VRLA lead acid

Capacity = 3.0 kWh (50 % depth of discharge)

Voltage = 24V

A 20 ampere current rating solar charge controller is placed between panel and battery for the safety issues of battery.

Inverter is required to supply 240V AC current to the motor from the battery

RESULTS AND DISCUSSION

I. Power generated and load run time:

Polycrystalline panel is able to generate 1.404kWh energy in alto car, if it takes whole day sunshine and car air conditioner needs 0.738 kW power at peak load. Hence, it can be calculated that, using polycrystalline panel, it can generate power which is sufficient to run car air conditioner for nearly 2 hours.

Article Indexed in :

DOAJ

Google Scholar

DRJI

BASE

EBSCO

Open J-Gate

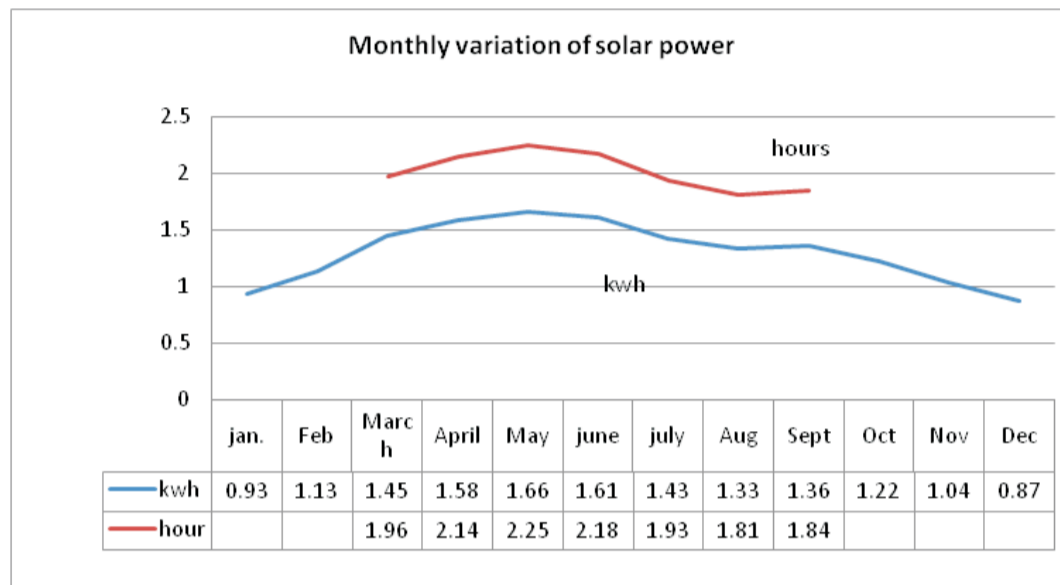


Fig.1.1: Monthly power generated and load run time

Solar energy varies from day to day. So the graph shows the monthly variations of solar power generation by using polycrystalline solar panel on the roof of the car. Air conditioner running hours are also shown up to which it can be run at full load. In India, like country air conditioner is used six to seven months of a year. The biggest advantage of this system is that availability of solar energy has a direct relation with the cooling load of air conditioner. In other months of the year this solar power may be used for heating application or other accessories.

II.COST COMPARATIVE ANALYSIS:

Solar operated auto air conditioner system is eco friendly as compare to the present engine driven AC system. Generally combustion of one litre of petrol emits 240 gm of carbon mono oxide, 2.5 kg of carbon Di oxide, 1 gm of hydro carbons, and 0.1 gm of nitrogen oxide.

But for successful implementation of this system, it should be cost effective also. So a cost comparison is made between the present system and solar operated system. Break even analysis (BEP) is made for this cost analysis.

Following are some assumptions which are used for this cost analysis

- i)The vehicle is run maximum 2 hour daily.
- ii)Car takes complete day sunshine that may be during running or parking time.
- iii)Car gives 20km/litre mileage without air conditioner work and 16km/litre with air conditioner work.
- iv)Fuel price is 70Rs/litre
- v)A car runs nearly one lakh km in 10 years of life.

Article Indexed in :

DOAJ	Google Scholar	DRJI
BASE	EBSCO	Open J-Gate

FEASIBILITY STUDY OF UTILIZING SOLAR ENERGY IN AUTOMOBILE AIR CONDITIONING

Fixed cost:

Cost of panel: There is installation capacity of 280 Watt solar panel space on Maruti Suzuki Alto car, and the cost of large polycrystalline panels is generally taken as 40 Rs/watt, hence

Panel cost = $280 \times 40 = 11200$ Rs

Cost of Lead acid battery = 18000 Rs

There are requirement of some other equipments like solar charge controller, AC motor, inverter etc.

So balance of system (BOS) cost is taken as 5000 Rs.

Total initial cost i.e fixed cost = 34200 Rs

Variable cost: In this system the only variable cost is battery replacement cost. As already mentioned, VRLA lead acid batteries are having a life of 1200 cycles. Generally a car uses 250 days of a year. Then battery replacement is required after 5 years or after 50,000 km of run. Generally battery has a 40% resale value. Hence battery maintenance cost is Rs 10800 on 50000km use.

Variable cost per unit km run: $\text{Rs } 10800/50000 = 0.216$ Rs /km

Total cost: Fixed cost + Variable cost \times km run

Fuel saved value by solar air conditioner:

As we have already assumed that, car gives the mileage of 20km/litre when car run without air conditioner operation and 16 km/litre with air conditioner operation.

Fuel saved using solar energy = $\left[\frac{x}{16} - \frac{x}{20} \right]$ litre

Here x, is the distance travelled by the car with Air conditioner

Now, saving in rupees = $70 \times \left[\frac{x}{16} - \frac{x}{20} \right]$

We can plot a graph using all the data that is calculated above

Article Indexed in :

DOAJ

Google Scholar

DRJI

BASE

EBSCO

Open J-Gate

FEASIBILITY STUDY OF UTILIZING SOLAR ENERGY IN AUTOMOBILE AIR CONDITIONING

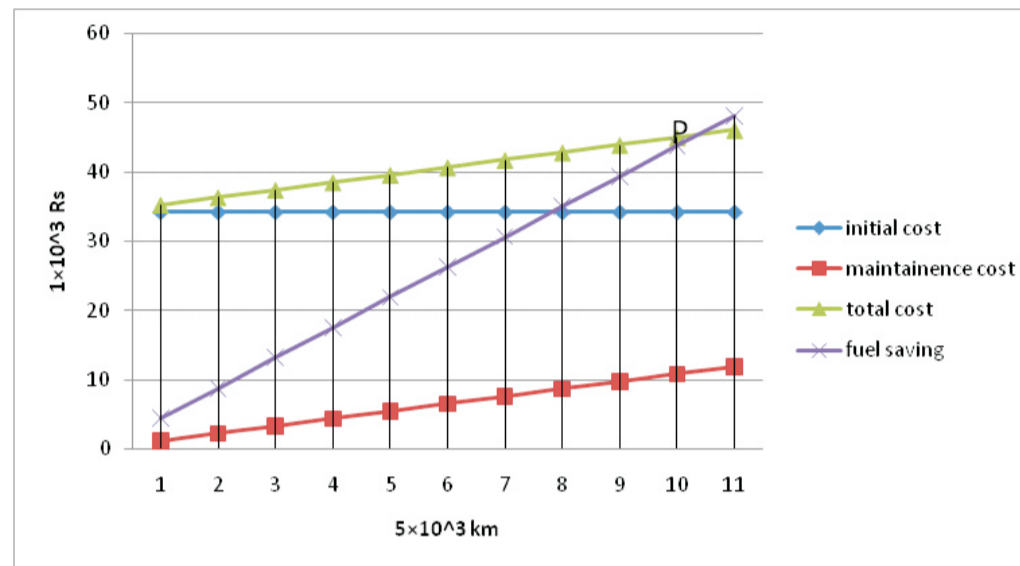


Fig.1.2: Cost analysis through breakeven point

In the above graph point 'p' is the breakeven point, which shows the point at which there is no profit and no loss.

Calculation of BEP:

X co-ordinate shows the car total km run and y co-ordinate shows the cost

Fixed cost (F): $y = 34200$ (1)

Variable cost or maintenance cost (V): $y = 0.216x$ (2)

Total cost (T): $y = 34200 + 0.216x$ (3)

Value of fuel saved by this solar operated system after x km:

$$y = 70 \times \left[\frac{x}{16} - \frac{x}{20} \right]$$

or $y = 0.875x$ (4)

At breakeven point:

$$34200 + 0.216x = 0.875x$$

$$x = 51897 \text{ km}$$

At this point, if car runs 51897 km, owner of car can get his spent cost of solar system back in the form of fuel saving and any over running of car from this point gives him profit.

Article Indexed in :

- | | | |
|------|----------------|-------------|
| DOAJ | Google Scholar | DRJI |
| BASE | EBSCO | Open J-Gate |

CONCLUSIONS

Feasibility of the solar driven auto air conditioner is checked under different working conditions and following conclusions are determined through the appropriate calculations and practical consideration with reasonable assumptions:

- ▲ There is direct relation between solar energy and AC requirement i.e. more the sunshine more will be the requirement of cooling(say in summer) and less the sunshine less will be the requirement of cooling (say in winter or monsoon). This relation gives the major strength to this project feasibility.
- ▲ Air conditioner compressor can be run with the help of 230 V, AC motor of power 738 watt.
- ▲ Sufficient solar power to run the motor can be generated by installing a solar panel on the roof of the car. This solar energy can run the motor nearly 2 hour a day at peak load.
- ▲ Polycrystalline solar panel and VRLA lead acid battery are advised for such a system work. Because this combination makes a good compromise between cost and work performance.
- ▲ This solar operated Air conditioner system is both eco friendly and cost effective. It reduces the dependency of Air conditioner on car engine i.e. air conditioner can be run without engine working like on red light etc.
- ▲ Extra solar energy can also be used for power the other car accessories like music system, light, 12 V car battery etc.

REFERENCES:

- 1.Agrawal Jitisha (2015), "Sustainable assessment of electromechanical devices", International Journal for Scientific Research & Development , Vol.2, Issue 11, 145- 147.
2. Ahmed and Tiwari (2009), "Optimization of Tilt Angle for Solar Collector to Receive Maximum Radiation", The Open Renewable Energy Journal, 2, pp19-24.
- 3.Anuphapparadorn,S., et al (2014), "Comparison the economic analysis of the battery between lithium-ion and lead-acid in PV stand-alone application", Energy Procedia 56, 352 – 358
- 4.Bhoye,H. and Gaurang Sharma (2014), "An Analysis of One MW Photovoltaic Solar Power Plant Design", International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering Vol. 3, Issue 1
- 5.Chapin,D. et al (1954), "A New Silicon p-n Junction Photocell for Converting Solar Radiation into Electrical Power", J. Appl. Phys. 25, 676.
- 6.Chegaar,M. et al (1988), "Estimating Global Solar Radiation Using Sunshine Hours", Physique Energétique, 7 – 11.
- 7.Chegaar,M. and P. Mialhe (2008), "Effect of atmospheric parameters on the silicon solar cells performance", Journal of Electron Devices, Vol. 6, pp. 173-176
- 8.Dhull,S. and Aggarwal,M.L. (2014), "Automation in material handling system for light load applications", fourth national conference on Recent Advances in Manufacturing NIT Surat, pp 202-206
- 9.Farrington R. and Rugh F.(2010), "Impact of Vehicle Air-Conditioning on Fuel Economy, Tailpipe Emissions, and Electric Vehicle Range", National Renewable Energy Laboratory (NREL)
- 10.Geon Lee and Tae Lee (2004), "A study on the variable displacement mechanism of swash plate type

Article Indexed in :

DOAJ	Google Scholar	DRJI
BASE	EBSCO	Open J-Gate

FEASIBILITY STUDY OF UTILIZING SOLAR ENERGY IN AUTOMOBILE AIR CONDITIONING

- compressor for automotive air conditioning system”, Int .Compressor Engineering Conference at Purdue: C079
- 11.Green,M.A. (2004), “Third Generation Photovoltaics: Advanced Solar Energy Conversion”, Springer-Verlag: Berlin, Germany.
 - 12.Osterwald,C.R. et al (2002), “Degradation Analysis of Weathered Crystalline-Silicon PV Modules”, 29th IEEE PV Specialists Conference, New Orleans, Louisiana
 - 13.Reis,A.M. et al (2002), “Comparison OF PV Module Performance before and after 11 years of field exposure”, Proceedings of the 29th IEEE Photovoltaics Specialists Conference New Orleans, Louisiana
 - 14.Rizzo,G. and Sorrentino M. (2007), “Optimal Design and Dynamic Simulation of a Hybrid Solar Vehicle”,SAE TRANSACTIONS - Journal of Engines, Vol. 115-3, pp. 805-811.
 - 15.R. van den Hoed (2007), “Sources of radical technological innovation: the emergence of fuel cell technology in the automotive industry,” Journal of Cleaner Production, vol. 15, no. 11-12, pp. 1014–1021.
 - 16.Sen and Zekai (2008), “Solar energy fundamentals and modelling techniques: atmosphere, environment, climate change and renewable energy”, Springer, pp 44-70.
 - 17.Sharma,B.D. (2011), “Performance Of Solar Power Plants In India”, Central Electricity Regulatory Commission, New Delhi
 - 18.Srinivasan,D. and Prasad Phadke(2006), “Reducing Ac Power Consumption By Compressor Downsizing On A Sports Utility Vehicle”, International Refrigeration and Air Conditioning Conference.
 19. Yadav,S. And Aggarwal,M.L.(2014), “ Effect of Lifting Load on Solar Powered Screw Jack Design In Automotive Vehicles”, International Journal for Scientific Research & Development Vol. 2, Issue 10, 2321-0613
 - 20.Yadav,S. And Aggarwal,M.L.(2015), “Sustainable Design of Automated Toggle Screw Jack for Lifting Automotive Vehicles”, National Conference on Sustainable Manufacturing (NCSM), MNIT Jaipur
 - 21.Yong-guang Liu and Guo Hui (2012), “Motion Simulation and Dynamic Analysis of a Four Cylinder Wobble-Plate Compressor”, Conference on Mechanical Engineering and Material Science (MEMS)
 - 22.Zaharim,A. et al (2009), “Time Series Analysis of Solar Radiation Data in the Tropics”, European Journal of Scientific Research, Vol.25 No.4, pp.672-678.

Article Indexed in :

DOAJ	Google Scholar	DRJI
BASE	EBSCO	Open J-Gate

Publish Research Article International Level Multidisciplinary Research Journal For All Subjects

Dear Sir/Mam,

We invite unpublished Research Paper, Summary of Research Project, Theses, Books and Book Review for publication, you will be pleased to know that our journals are

Associated and Indexed, India

- * International Scientific Journal Consortium
- * OPEN J-GATE

Associated and Indexed, USA

- EBSCO
- Index Copernicus
- Publication Index
- Academic Journal Database
- Contemporary Research Index
- Academic Paper Database
- Digital Journals Database
- Current Index to Scholarly Journals
- Elite Scientific Journal Archive
- Directory Of Academic Resources
- Scholar Journal Index
- Recent Science Index
- Scientific Resources Database
- Directory Of Research Journal Indexing

Golden Research Thoughts
258/34 Raviwar Peth Solapur-413005, Maharashtra
Contact-9595359435
E-Mail-ayisrj@yahoo.in/ayisrj2011@gmail.com
Website : www.aygrt.isrj.org